

LPD23 Series PRCD







FEATURES

- Ideal for electric faucets and DIY installations of various appliances.
- Combines leakage current protection and plug overheat protection (customizable as needed).
- Rapidly cuts power in less than 0.1 seconds to prevent electric shocks.
- Equipped with premium wiring terminals for easy and safe installation.
- Crafted from high-performance polycarbonate, providing strong impact resistance and flame resistance.
- Holds CQC and CCC certifications.

SPECIFICATIONS

Model: LPD23

Safety Certification	CQC, CCC certification	Rated Residual Current Operating Time	≤ 0.1s
Application Standard	GB/T 20044-2012	Rated Making and Breaking Capacity	250A
Operating Temperature Range	-5°C ~ 40°C	Rated Residual Making and Breaking Capacity	250A
Rated Voltage	220V AC	Rated Short-Circuit Current Limit	1500A
Rated Current	6A、10A、16A (option)	Rated Limited Short-Circuit Current	1500A
Rated Frequency	50Hz	Standby Power Dissipation	≤ 0.3W
Rated Residual Operating Current	6mA、10mA、15mA、30mA (option)	Level of Protection (IP)	IPX4
Rated Residual Non-Operating Current	3mA、5mA、7.5mA、15mA (option)	Plug Type (GB/T 1002-2021)	2P+PE
		Standard Cord Set	Rated current 6A: 3×0.75mm ² Rated current 10A: 3×1.0mm ² Rated current 16A: 3×1.5mm ²

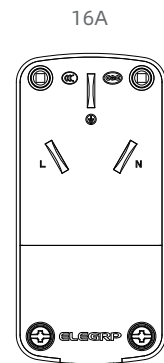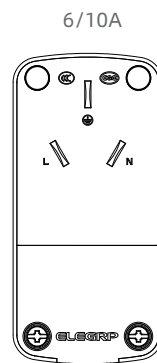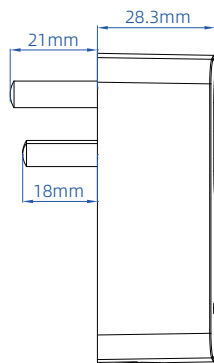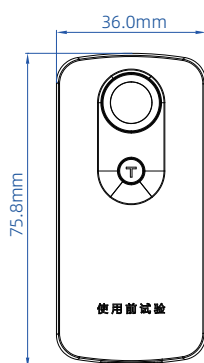

ELEGRP

Ideal For *Electric Faucets*
And *DIY Installations*

