

P205 Series Portable Residual Current Devices (PRCD)

FEATURES

- Leakage current protection function , high safety performance.
- Small volume, the whole machine is ultra-thin, compact space, to meet different installation space.
- Easy to use, energy-saving and environmentally friendly,passed the German TUV and EU CE certification.
- Waterproof IP66 rating,96 hours of continuous operation in a humid environment.
- Long service life, low power consumption, stable performance, strong anti-interference ability and etc.




SPECIFICATIONS

Executive Standard(s)	IEC 61540:1997、 HD 639 S1:2002+A1+A2(IEC61540)
Operating Ambient Temperature	-25°C ~ +40°C
Rated Operating Voltage	220 - 250V AC
Rated Operating Current	6A、 10A、 13A、 16A (Optional)
Rated Frequency	50Hz
Rated Residual Operating Current	10mA、 15mA、 30mA (Optional)
Rated Residual Non-Operating Current	5mA、 7.5mA、 15mA (Optional)
Rated Residual Current Operating Time	≤0.1s

SPECIFICATIONS

Rated Making and Breaking Capacity	250A
Rated Residual Making and Breaking Capacity	250A
Rated limit short-circuit current	1500A
Rated limit residual short-circuit current	1500A
Standby Power Dissipation	≤0.5W
Ingress Protection	IP66
Standard Wire(s)	H03VV-F、H03VVH2-F、H05VV-F、H05VVH2-F、H05RR-F、H05RN-F、H07RN-F
Plug Type	2P、2P+PE

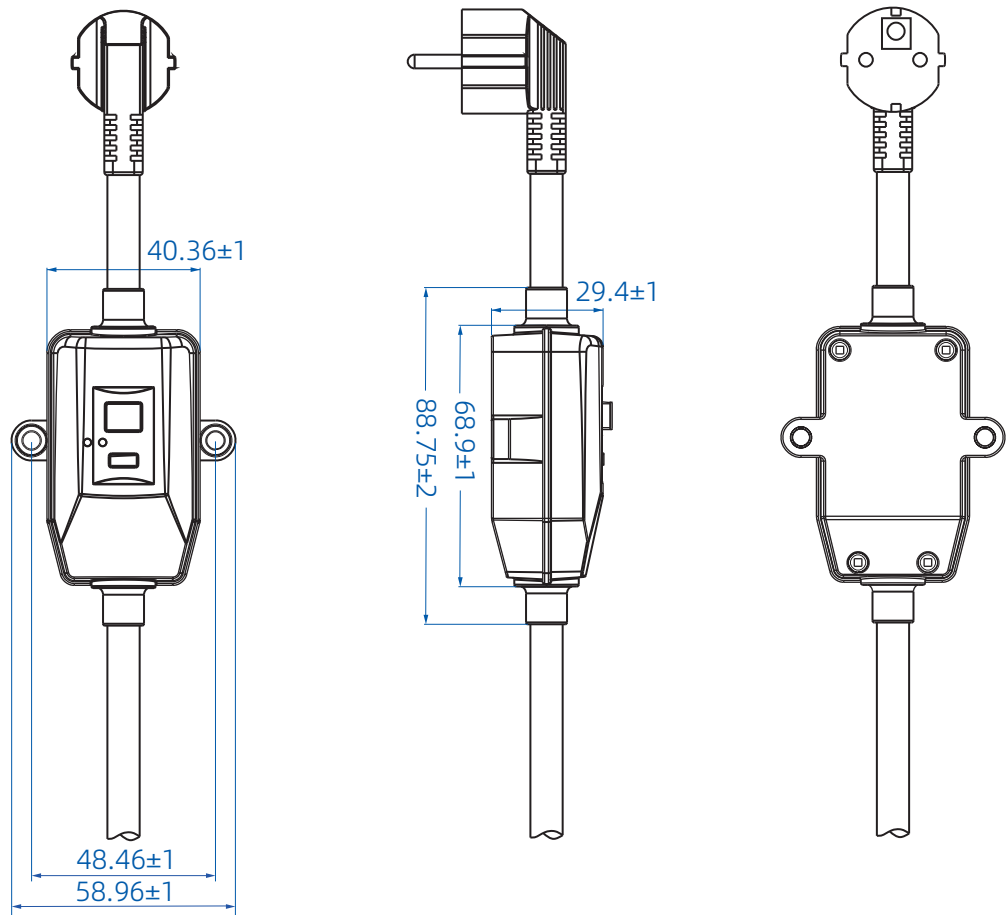

Unit: mm

Note:
The picture is for reference only.
Detailed information refers to the actual product.