



LBS23 Series Portable Residual Current Devices (PRCD)


FEATURES



- Leakage current protection to enhance appliance safety.
- Easy to use, energy-saving and environmentally friendly, passed the German TUV and EU CE certification.
- LED Safe Working Indicator Light.
- Optional overvoltage protection and ground detection functions to suit diverse needs.
- High IP protection, waterproof IP66 rating.
- Long service life, key life is 10,000 times.

SPECIFICATIONS

Executive Standard(s)	IEC 61540
Operating Ambient Temperature	-25°C ~ +40°C
Rated Operating Voltage	230V AC
Rated Operating Current	16A
Rated Frequency	50Hz
Rated Residual Operating Current	10mA、30mA (Optional)
Residual Current Characteristics	Type A
Rated Residual Non-Operating Current	5mA、15mA (Optional)
Rated Residual Current Operating Time	≤0.3s (5IΔn≤0.04s、250A≤0.04s)
Rated Making and Breaking Capacity	250A
Rated Residual Making and Breaking Capacity	250A
Standby Power Dissipation	≤0.75W
Ingress Protection	IP66

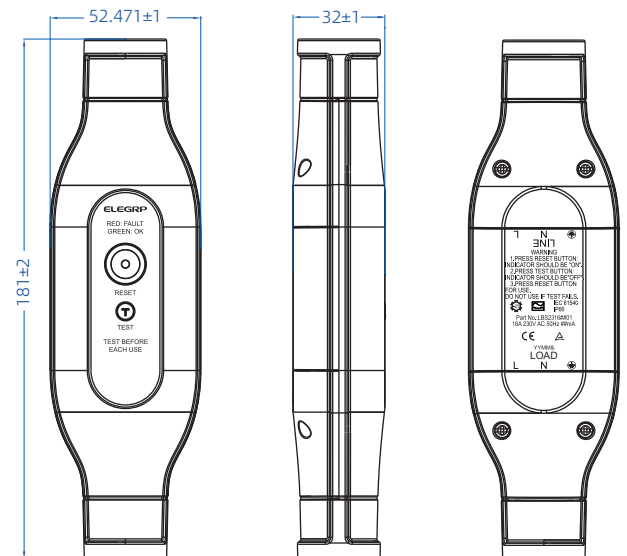

Unit: mm

Note:
The picture is for reference only.
Detailed information refers to the actual product.