




# LBD23 Series Portable Residual Current Devices (PRCD)

## FEATURES

- Leakage current protection to enhance appliance safety.
- Flexible wiring, optional overvoltage protection to suit diverse needs.
- Easy to use, stability and environmentally friendly, passed the European Union(EU) CE certification.
- Durable products with long service life.
- LED Safe Working Indicator Light.

## SPECIFICATIONS

Executive Standard(s)	IEC 61540、IEC 61543、IEC 60884-1、IS 1293-2019
Operating Ambient Temperature	-5°C ~ +40°C
Rated Operating Voltage	230V AC
Rated Operating Current	6A
Rated Frequency	50Hz
Rated Residual Operating Current	10mA、30mA (Optional)
Rated Residual Non-Operating Current	5mA、15mA (Optional)
Residual Current Characteristics	Type A
Rated Residual Current Operating Time	≤0.3s (5IΔn≤0.04s、250A≤0.04s)
Rated Making and Breaking Capacity	250A
Rated Residual Making and Breaking Capacity	250A
Standard Configured Cable(s)	3x1.0mm <sup>2</sup> 、3x0.75mm <sup>2</sup>
Ingress Protection	IP4X

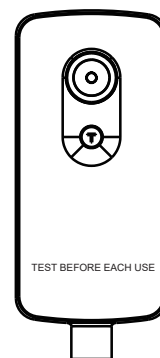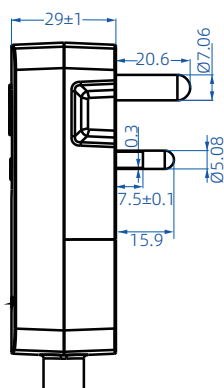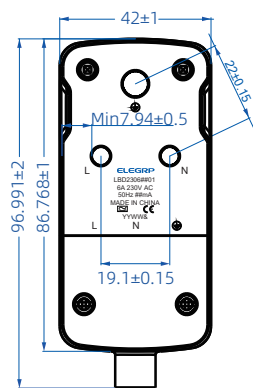

Unit: mm

Note:  
The picture is for reference only. Detailed information refers to the actual product.