




User Manual

Matter Smart Plug

ELEGRP

PRODUCT INTRODUCTION

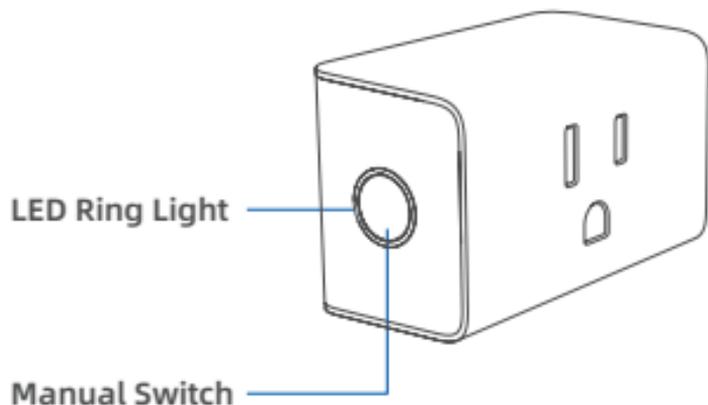

Press the switch button to turn on/off the smart device.
Press and hold the switch button for 5s for network pairing.

LED RING LIGHT STATUS

White

Power On

Flashing Blue

Connecting to Wi-Fi

SPECIFICATION

Model: MP10

Input: 120V~ 60Hz 15A Max.

Output: 120V~ 60Hz 15A 1800W Max. Resistive

Wi-Fi Network: 802.11b/g/n, 2.4GHz (only)

Purpose of Control: Operating Control

Type of Action: Type 1 Action

Pollution Degree: 2

Rated Impulse Voltage: 1500 V

BEFORE WE START

1. Ensure your mobile phone's Wi-Fi is turned on and is connected to your home **2.4GHz** Wi-Fi network. If your Wi-Fi router supports both the 2.4GHz and 5GHz dual bands, set their Wi-Fi names (SSID) differently or turn off the 5GHz from the wireless page of the router (the entry address is usually provided on the label attached to the back of the router), then connect your phone to the **2.4GHz** Wi-Fi network.
2. Ensure your mobile phone's Bluetooth is turned on.
3. Prepare the Wi-Fi password of the Wi-Fi network that your mobile is connected to.



2.4GHz Wi-Fi Ready



5GHz Wi-Fi Not supported

OPTION 1: USE ELEGRP HOME APP

a) Download the App

Scan the QR code or search [ELEGRP HOME](#) to download the App from the Apple App Store or Google Play.



b) Complete Setup in ELEGRP HOME App

1. Power on the smart device and ensure that the indicator light is blinking - this indicates that the device is in pairing mode. If not, press and hold the switch button of the smart device for 5 seconds until the indicator light starts blinking. The pairing mode will last for 15 minutes.
2. Open the App.
3. Scan the Matter QR code on the smart device.
4. Follow the instructions in the App to finish setup.

5. You also can enter the device setting page and get a new pairing code for device setup in other Matter-enabled Apps.



The QR code for Matter network configuration on each device is unique. Please keep it safe.

c) Connect to Amazon Alexa

1. Open the Amazon Alexa App and tap "Skills and Games" from the "More" menu.
2. Search the Skill name "ELEGRP HOME".
3. Tap "Enable to use".
4. If necessary, type in your ELEGRP HOME login information from the App account and grant authorization in the App.
5. Then you can control your devices in Amazon Alexa App or using voice through your Amazon Alexa devices.

d) Connect to Google

- 1a. If you're using Google Home App, open the App and tap the add icon "+" on the top left. Then find "Work with Google" from the list in "Set up device".

- 1b. If you're using Google Assistant App, open the App and tap your account name on the top right and then tap "Devices". Find "Link a device" from the list in "Add a device".
2. Search the name "ELEGRP HOME".
3. Tap "Continue".
4. If necessary, type in your ELEGRP HOME login information from the App account and grant authorization in the App.
5. Then you can control your devices in Google Home/Google Assistant or using voice through your Google Home devices.



Create ELEGRP HOME Account First

Due to the limitation of the system, you will need ELEGRP HOME account to connect with Amazon Alexa App or Google Home/Google Assistant App.

OPTION 2: USE 3RD PARTY MATTER-ENABLED APPS

a) Check Compatibility

A compatible Matter-enabled hub is required for integration with the respective 3rd party Apps. Before operation, please ensure **you have a required matter-enabled hub.**


Ecosystem	App	Matter-enabled Hub
Apple	HomeKit	<ol style="list-style-type: none">1. HomePod2. HomePod mini3. Apple TV 4K (3rd gen)
Google	Google Home	<ol style="list-style-type: none">1. Nest Hub (2nd gen)2. Nest Hub Max3. Nest Wifi Pro (Wi-Fi 6E)
Amazon	Amazon Alexa	<ol style="list-style-type: none">1. Echo (4th Gen)2. eero Pro3. eero Beacon4. eero Pro 65. eero 6
Samsung	SmartThings	<ol style="list-style-type: none">1. SmartThings 2018 Hub (IM6001-V3P01)2. Aeotec Smart Home Hub



The list provided on the previous page is only a partial reference and may not include all items. Please refer to the websites of each ecosystem for the latest compatible matter-enabled hubs.

b) Download the App

Search Matter-enabled Apps (including but not limited to HomeKit, Google Home, Amazon Alexa and SmartThings) from the Apple App Store or Google Play.

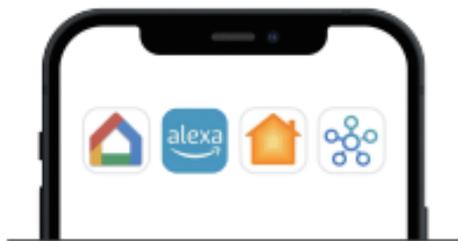

* The App icons shown above are for reference only. Please refer to the actual App icons on your phone for accuracy.

c) Complete Setup in 3rd Party Matter-enabled Apps

1. Power on the smart device and ensure that the indicator light is blinking - this indicates that the device is in pairing mode. If not, press and hold the switch button of the smart device for 5 seconds until the indicator light starts blinking. The pairing mode will last for 15 minutes.
2. Open the App.
3. Scan the Matter QR code on the smart device.
4. Follow the instructions in the App to finish setup.
5. You also can enter the device setting page and get a new pairing code for device setup in other Matter-enabled Apps.



Please note that the actual steps may differ based on the specific App. For accurate instructions, refer to the corresponding App and contact their customer service for any inquiries. The QR code for Matter network configuration on each device is unique. Please keep it safe.

FAILED TO SET UP

1. Check if your Smart Home App is up to date via the App Store.
2. Check if your Matter Hub is updated with the latest firmware available.
3. Confirm that both your phone and Matter Hub are connected to the same 2.4 GHz Wi-Fi network, and that the network has an active internet connection during the setup process.
4. Note that the Matter pairing mode is available for a limited time of 15 minutes. If your Matter device has been powered on for a longer duration and the indicator light stops blinking, you should re-enter the pairing mode by pressing and holding the switch button of the smart device for 5 seconds until the indicator light starts blinking.
5. If the Matter-certified device has already been added to a different ecosystem, you will need to obtain a new sharing code to proceed with the pairing process.
6. Reset the Matter-certified device by pressing and holding the switch button of the smart device for 5 seconds and retry the setup process.

IMPORTANT SAFETY INSTRUCTIONS

- READ ALL INSTRUCTIONS BEFORE USING.
- Keep away from children and pets.
- Avoid using in humid environments, outdoors, or near heating devices.
- Protect from extreme temperatures, direct sunlight, strong impacts, high humidity, flammable gases, vapors and solvents.
- Do not disassemble, modify, or repair the device. Seek professional help for malfunctions.
- Stop using the device if it's not working properly or is visibly damaged.
- Avoid storing in poor ambient conditions for extended periods.
- Do not use aggressive detergents or chemical solutions.
- Do not connect in series.
- Do not cover during use.
- Unplug before checking voltage.
- Always disconnect Adapter from the outlet when not in use.
- Indoor use only.
- Do not touch any metal part of the adapter while using it.
- The pictures in this manual are for reference only. Please refer to the actual product and App pages for accuracy.

SAVE THESE INSTRUCTIONS

FCC COMPLIANCE STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This product must be installed and operated with a minimum distance of 20 cm between the radiator and user body. Contains Transmitter Module
FCC ID: 2ANDL-CB2S.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ISED CANADA COMPLIANCE STATEMENT

This device contains license-exempt transmitter(s) / receiver(s) that comply with Innovation, Science and Economic Development Canada's license exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This device complies with Radio Apparatus Standard of RSS-247. Cet appareil est conforme à la norme d'appareils de radio de CNR-247.

Radiation Exposure Statement

This equipment complies with RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with the distance more than 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements CNR-102 établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à une distance supérieure à 20 cm entre le radiateur et votre corps.

ONE YEAR LIMITED WARRANTY

The warranty gives you specific rights and you may also have other rights, which vary in different states and countries. Our company warrants to the original consumer purchaser that this product is free of defects in materials and workmanship for 1 year from the purchase date. **This warranty does not cover labor for removal or reinstallation of the product and is void on any product installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner.** Our company excludes incidental or consequential damages for breach of any warranty on this product. Some jurisdictions may not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you.

HAVING PROBLEMS? WE CAN HELP!

Email: support@elegroup.com

Call us on: 866-267-3272 Mon-Fri 9:00-17:00 EST (US)

Feel free to contact us with any questions or concerns.
Our customer service team will work hard to put a smile
back on your face.

About Us

Website: www.elegroup.com

Search [ELEGRP](#) on social media